





KOSMEX CO., LTD

TRUSTABLE & DEDICATED

GET IT TOUCH

Address: No 5, Lane 205/37/26
Xuan Dinh Street, Xuan Dinh Ward,
Bac Tu Liem, District, Hanoi, Vietnam
Email: Anna@kosmexgroup.com
Mobile: +8439974-1589

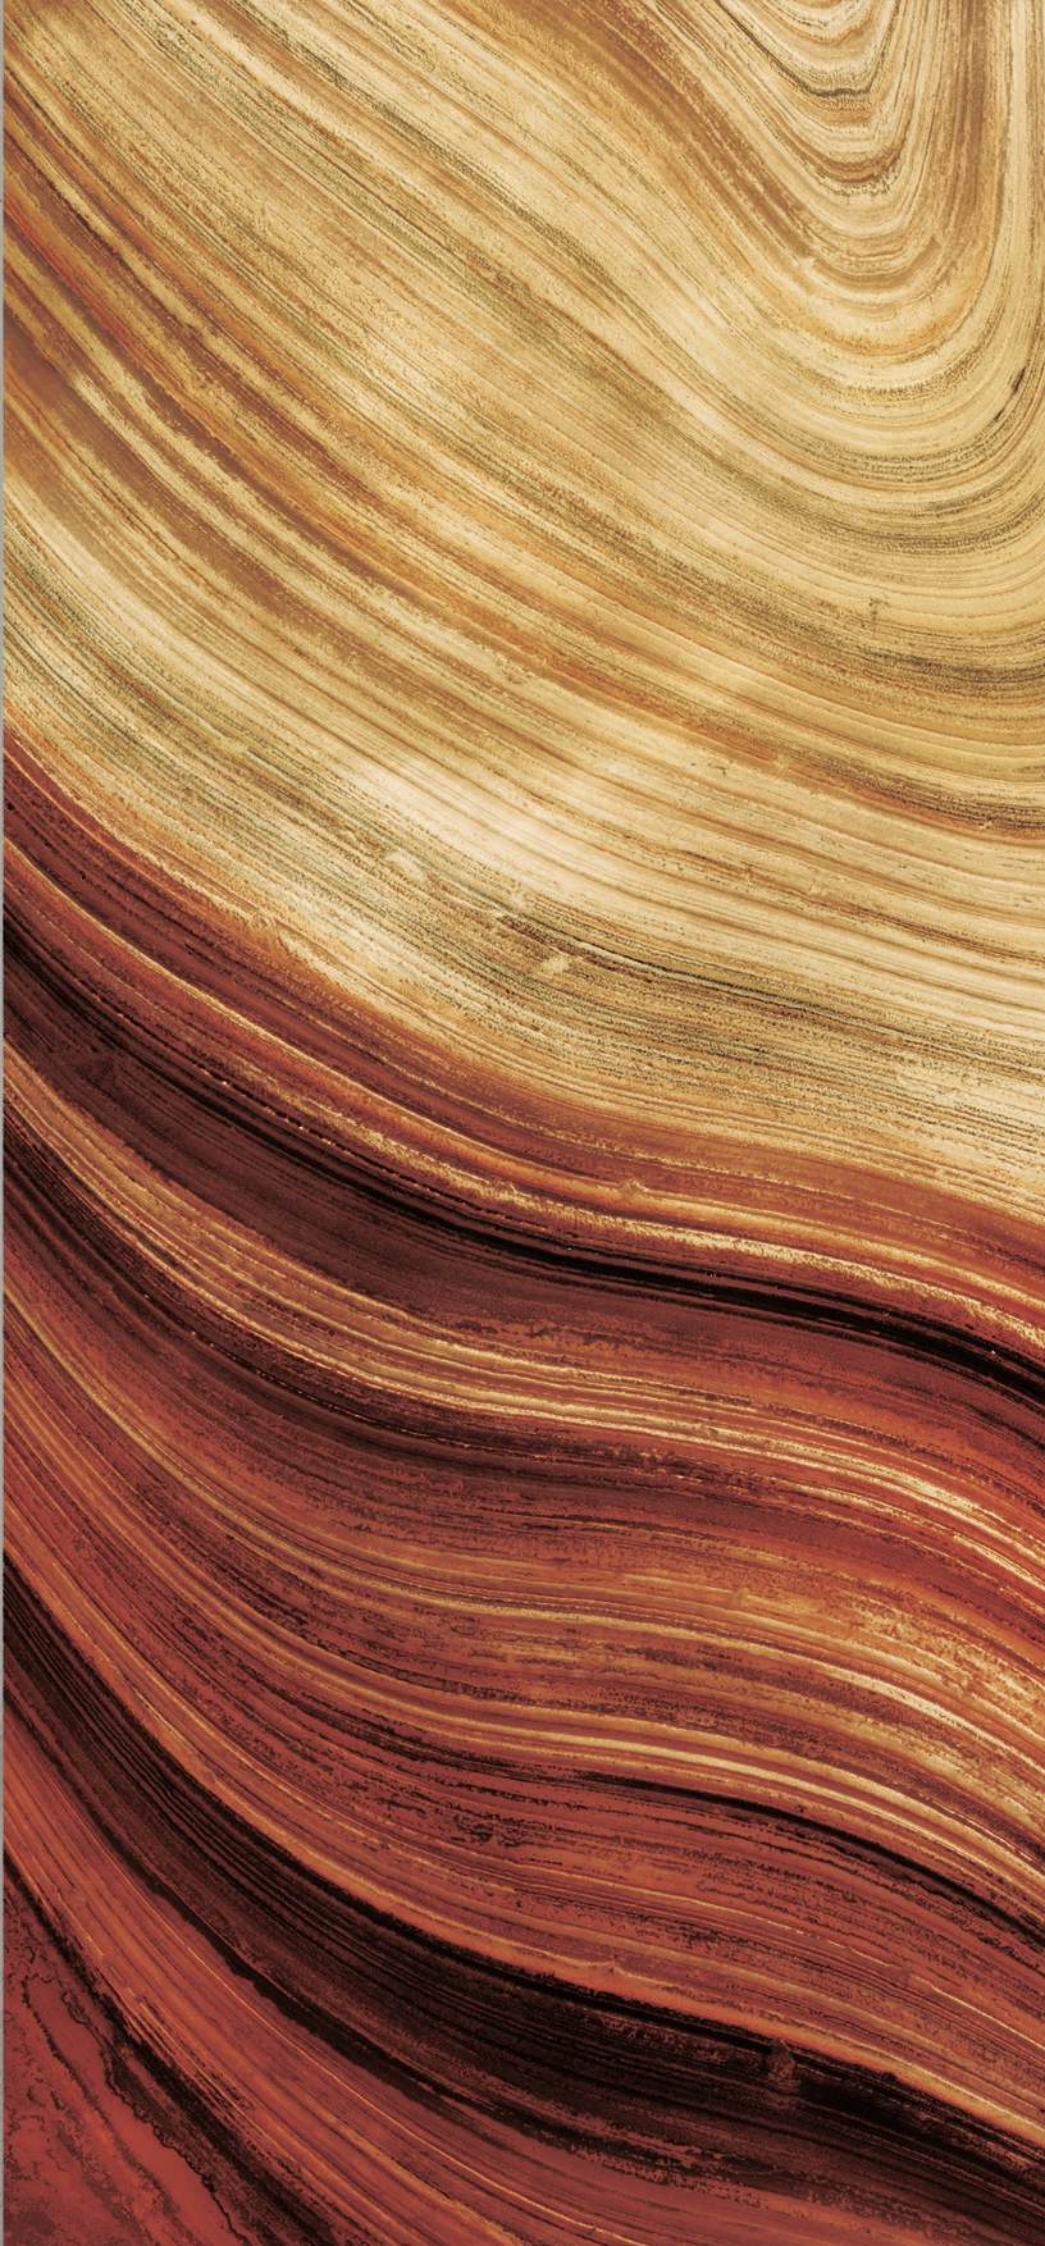

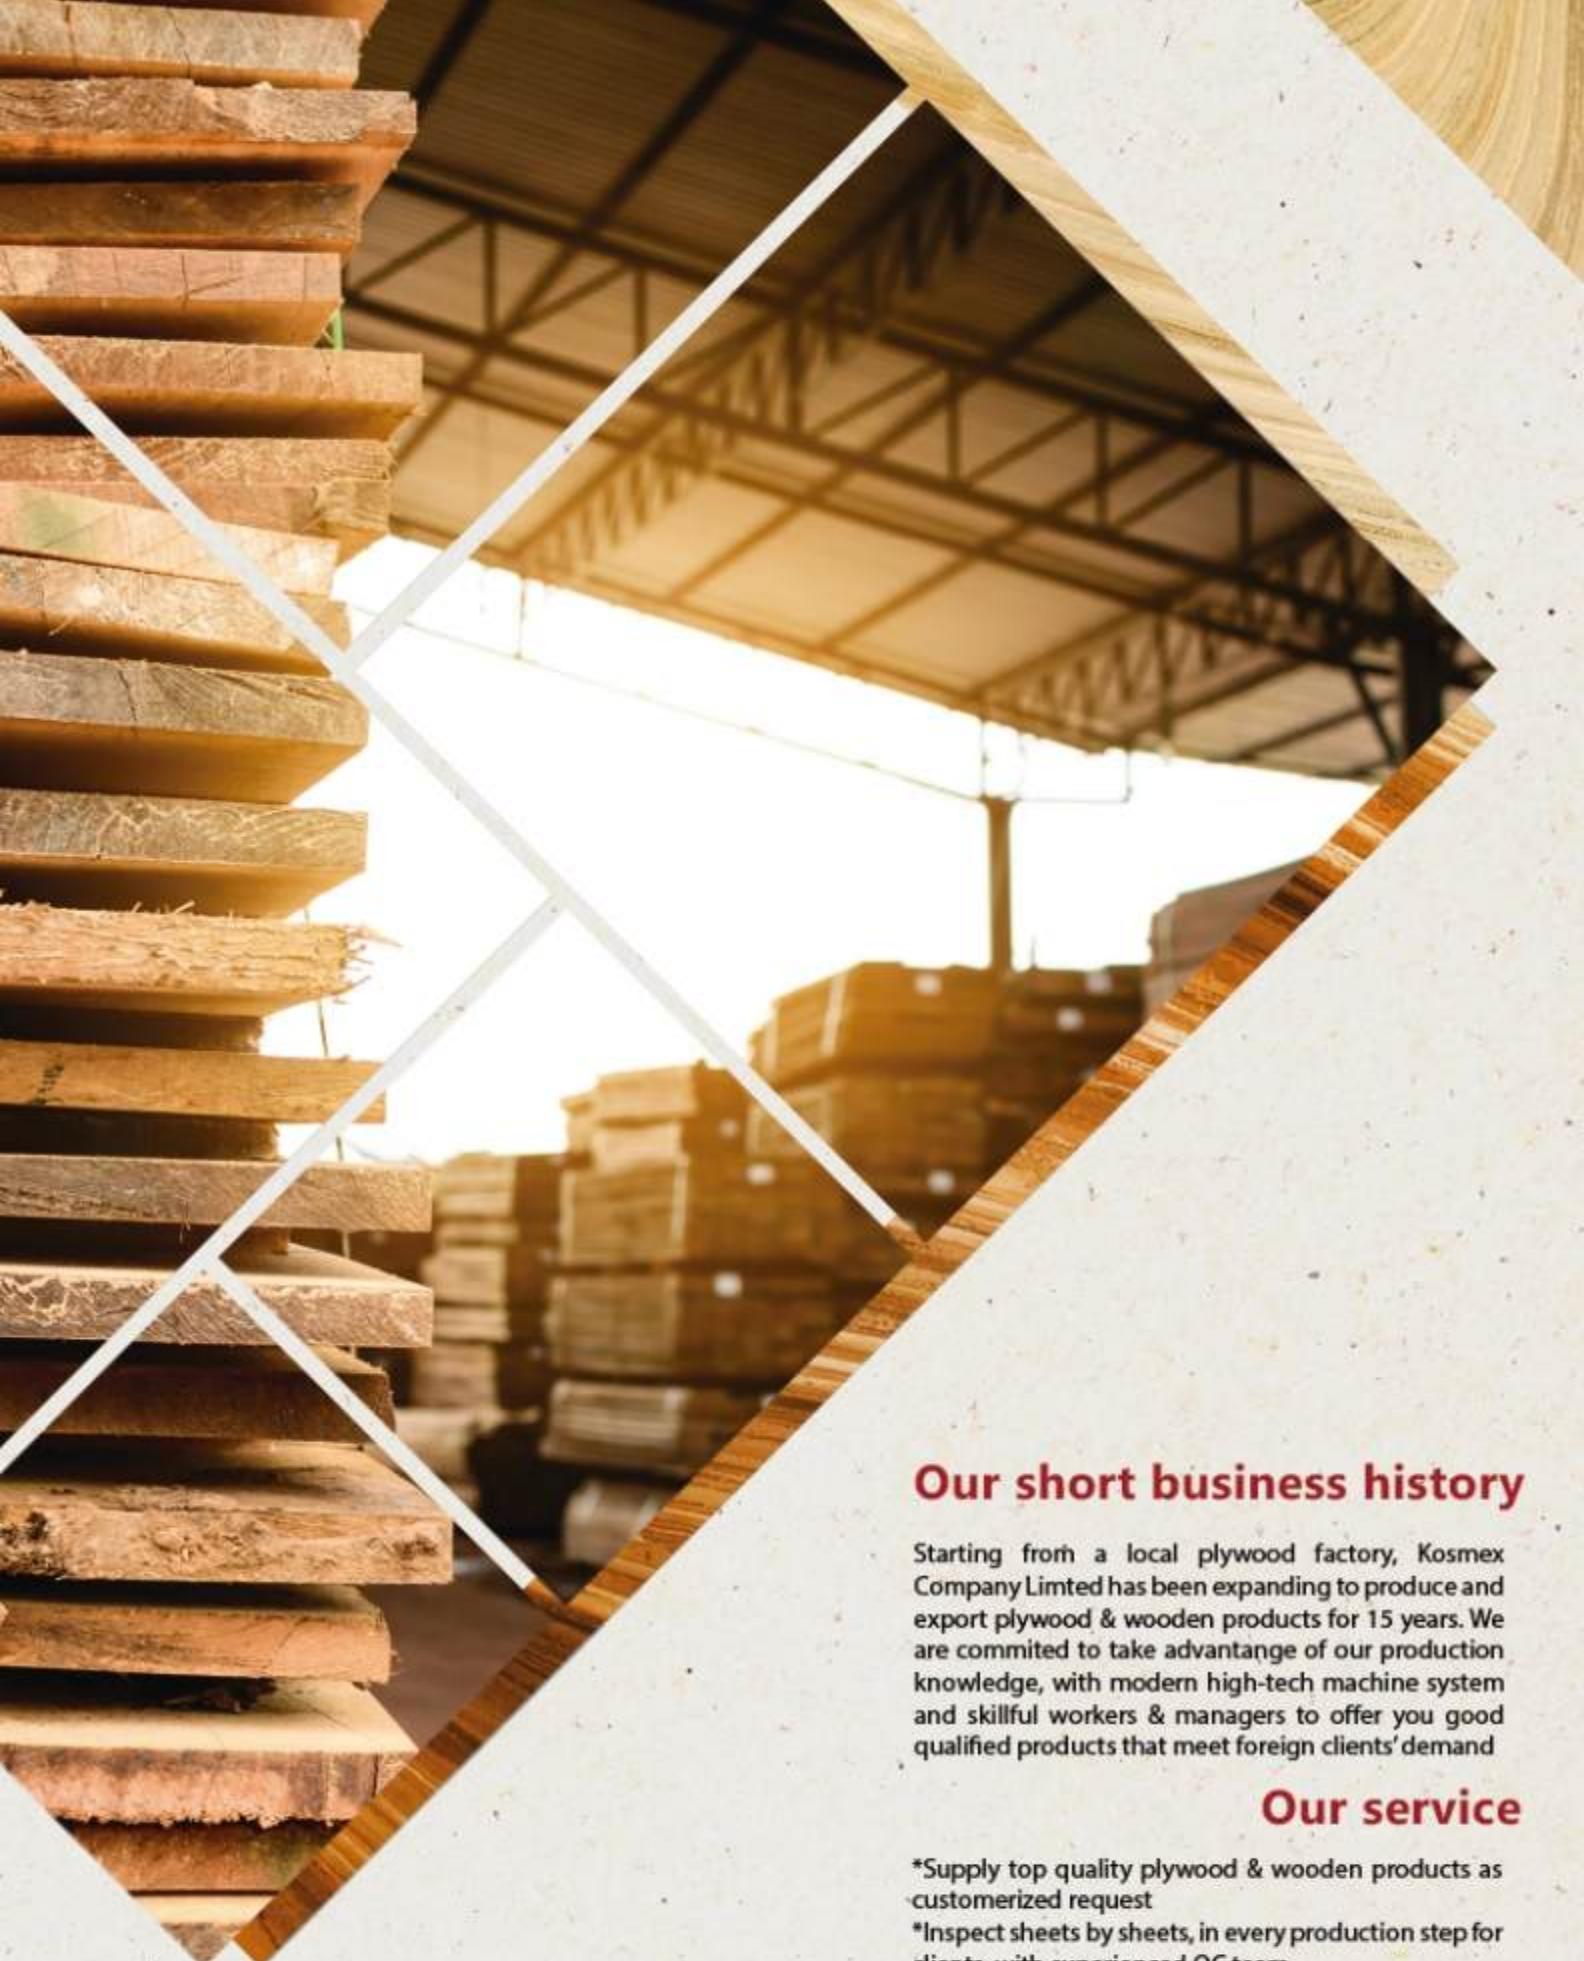

Our short business history

Starting from a local plywood factory, Kosmex Company Limited has been expanding to produce and export plywood & wooden products for 15 years. We are committed to take advantage of our production knowledge, with modern high-tech machine system and skillful workers & managers to offer you good qualified products that meet foreign clients' demand

Our service

- *Supply top quality plywood & wooden products as customerized request
- *Inspect sheets by sheets, in every production step for clients, with experienced QC team
- *Guarantee quality to client's warehouse
- *Full export and shipping service with safe carefull impressive packaging suitable for sea way shipping

YOU ORDER, WE CARE QUALITY TO YOUR WAREHOUSE



Plywood Factories:

Around 9,150 m² of total manufacturing area, including:

+ 9,000 m² of manufacturing area for some plywood kinds : packing, commercial, furniture and film faced plywood...

+ 150 m² of office area

Our capacity: Monthly each factory produce 2000 CBM

We can do OEM for customer request.



GENERAL SPECIFICATIONS

SIZE :

1220 x 2440mm
1200 x 2400mm
1250 x 2500mm
Or customerized size

THICKNESS:

From 5.2mm to 25mm

AVAILABLE FACE SPECIES :

Birch, Pine, Okume,
Bintangor, Sapele,

Engineer Veneer or as customerized face

CORE:

Plantation local wood
(Acacia, Eucalyptus,
Light Mixed Hardwood)

CORE SANDING:

Yes

CORE DRIED:

100% by machine

DENSITY:

Eucalyptus core: > = 600 kg/m³

Acacia core: > = 550 kg/m³

Light Mixed Hardwood core : > = 500kg/m³



FLAT BED SLATS

SIZE:

Thickness

From 8mm to 25mm

Width

Customerized size, maximum 1220mm

Length

Customerized size, maximum 2440mm

AVAILABLE FACE SPECIES CORE

Rubber

Plantation Rubber

CORE SANDING EDGE SANDING

Yes

Yes

CORE DRIED DENSITY RUBBER DENSITY GLUE

100% by machine

620- 650kg/m³

E0/E1/E2



FURNITURE PLYWOOD



BIRCH PLYWOOD

FACE/BACK SPECIES:

Birch

MOISTURE CONTENT:

10-14%

GRADE:

C, D, D+, E

GLUE:

MR- WBP- E0

UV COATED:

Can request

CERTIFICATE:

CARB-P2, TSCA Title VI / EPA

FACE BACK POLISH SANDING:

2 times sanding

PHYSICAL PROPERTIES:

Can pain on surface

Hold screw well

Suitable for laser cutting

USES:

Uses Cabinetry, furniture, desks, shelving, trim work, lamination, and general woodworking...

PINE FURNITURE PLYWOOD

FACE/BACK SPECIES:

Pine

MOISTURE CONTENT:

10-14%

GRADE:

A, B, C,D

GLUE:

B- bond, C- bond

FACE BACK SANDING:

Yes

CERTIFICATE:

CARB-P2

PHYSICAL PROPERTIES:

Can pain on surface

Hold screw well

Suitable for laser cutting

USES:

Cabinet, furniture, DIY projects...





CONSTRUCTION PLYWOOD

FACE/BACK SPECIES:

Pine

MOISTURE CONTENT:

10-14%

GRADE:

CDX

CERTIFICATE:

CARB-P2, TSCA Title VI / EPA

GLUE:

A bond, WBP glue

USES:

Building construction, millworks,
exterior walls and roofs...



FILM FACED PLYWOOD USAGE: CONSTRUCTION

SIZE:
1220mmx2440mm

THICKNESS:
11mm- 24mm

MOISTURE CONTENT:
=< 12%

CORE:
Acacia, eucalyptus

CORE SANDING:
Yes

CORE DRIED:
100% by machine

FILM:
Brown and black

DENSITY:
600-650 kg/ m³

TIMES OF REUSE:
6- 8 times, 8-10 times reused
depend on client request
20 times reused

GLUE:
Melamine
Phenolic

BOILING HOURS:
Up to 20 hours no delamination
Up to 72 hours no delamination

THICKNESS TOLERANCE:
+/- 0.5 mm



SHIPPING

We co-operate with many line vessel to arrange the best logistics for our global client's satisfaction



United States



Middle East



Europe



Japan



Australia



New Zealand

